



LBBJ Explosion-proof Aeronautic & Light Control Alarm Device(II B)

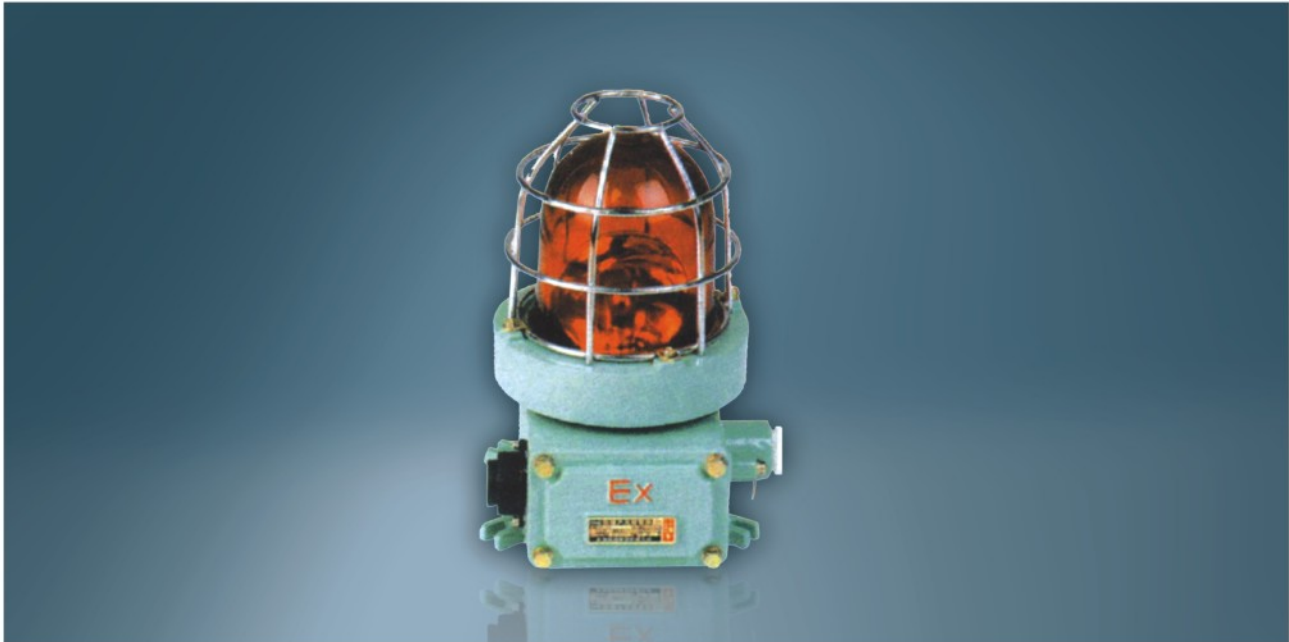

1. General

- 1.1 Can be used in Zone1 and 2 dangerous places.
- 1.2 Can be used in II A, II B group explosive atmosphere.
- 1.3 Suitable for IEC60079 standard request.

2. Type designation

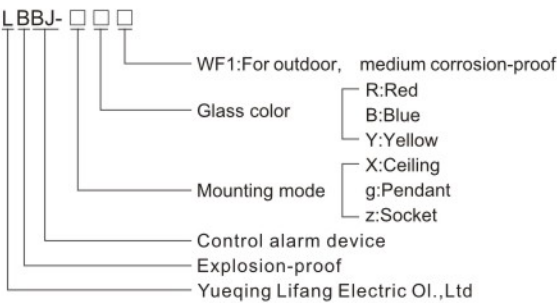

3. Specifications

Rated voltage	Sparkling frequency	Sound strength (dB)	Protection grade	Ex-mark	Inlet's thread (G")	Cable's outside diameter(Φ ,mm)
220V/50Hz	150/min	≥50	IP54	Exd II BT4	G3/4	10~14

4. Overall and mounting dimensions(mm)

