


LBQY Explosion-proof Corrosion-proof Full-plastic Fluorescent Lamp(II C)



1. General

- 1.1 Can be used in Zone1, Zone2, Zone20, Zone21, and Zone 22 hazardous areas.
- 1.2 Can be used in IIA, IIB , IIC group explosive atmosphere.
- 1.3 Can be used in flammable dust areas.
- 1.4 Suitable for IEC60079 standard request.

2. Type designation

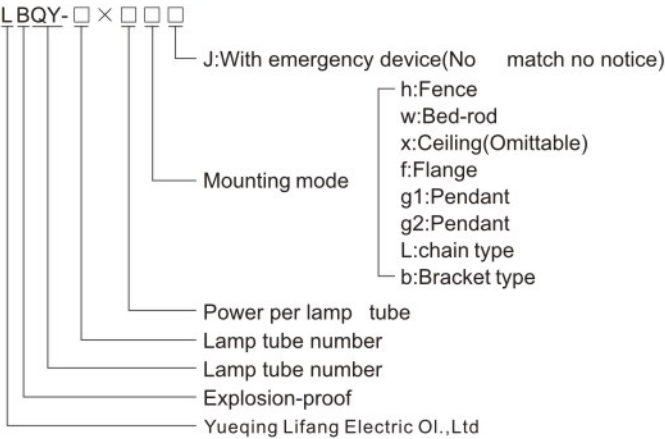

3. Specifications

Type	Rated voltage (V)	Rated power (W)	Cable's outside diameter(Φ,mm)	Ex-mark	Protection grade	Corrosion-proof
LBQY-2 × 20□	220V/50Hz	2 × 20	10~14	Exed II CT5	IP65	WF2
LBQY-2 × 40□		240				

4. Emergency equipment parameters

Starting duration in Emergency (S)	Charging time (h)	Lighting time in Emergency (min)
0.3	24	90