

LBC51 Explosion-proof Operating Post(II B)




1. General

- 1.1 Can be used in Zone 1 and Zone 2 dangerous places.
- 1.2 Can be used in II A, IIB group explosive atmosphere.
- 1.3 Suitable for IEC60079 standard request.


2. Type designation




3. Application of chief part

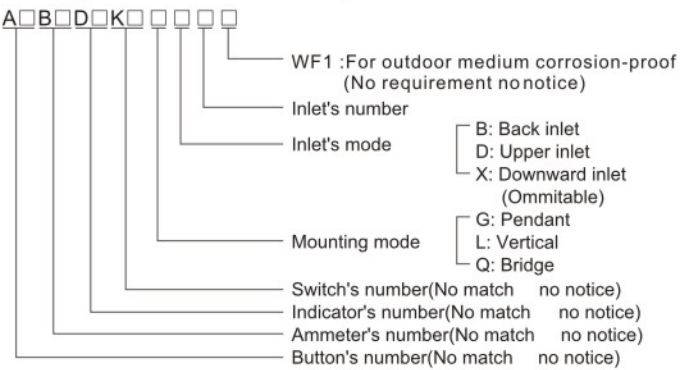


Application of first part




Application of second part

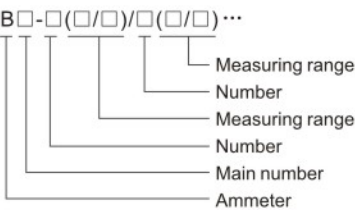

Application of third part



Application of third part



4. Specifications

Using sort	Rated voltage (V)	Rated current (A)	Ex-mark	Protection category	Corrosion-proof Grade	Inlet 's thread (G")	Cable's outside diameter(Φ ,mm)
AC-3 AC-4	220/380	10	Exde II BT6	IP54	WF1	1	12~17