


LBXK Explosion-proof Limiting Switch(II B、 II C)



1. General

- 1.1 Can be used in Zone 1 and Zone 2 dangerous places.
- 1.2 Can be used in II A、 II B group explosive atmosphere.
- 1.3 Suitable for IEC60079 standard request.

2. Type designation

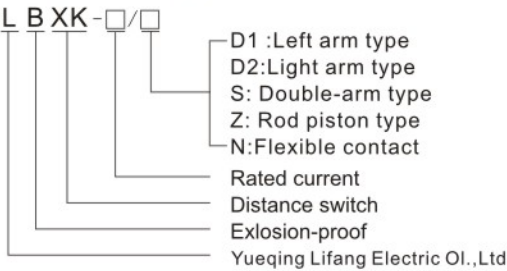

2. Specifications

Rated voltage	Rated current (A)	No. Of contact	Ex-mark	Inlet's thread (G")	Cable's outside diameter(Φ ,mm)	Weight (Kg)
380	6	1NO+1NC	Exed IIBT6	3/4	10~14	0.7

4. Overall and mounting dimensions(mm)

