


SC(JGK) Cable Lug

1. General

SC (JGK) cable lugs are suitable for the connection of copper conductors (section 1.5-1000mm) in power cable with electronic equipment. They are made of over 99.9% pure copper tube T2 and coated with tin. Working temperature is from -50 to $+150^{\circ}\text{C}$.

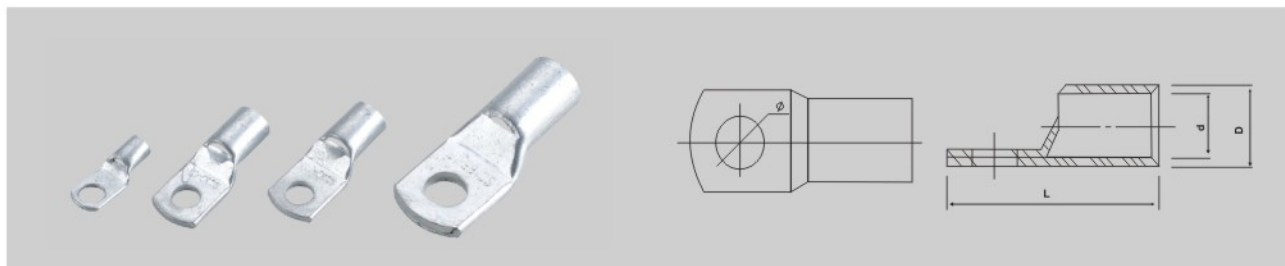

2. Specifications

Unit: mm


Type	SC(JGK)-1.5	SC(JGK)-2.5	SC(JGK)-4	SC(JGK)-6	SC(JGK)-10	SC(JGK)-16	SC(JGK)-25	SC(JGK)-35	SC(JGK)-50	SC(JGK)-70	SC(JGK)-95
ϕ	f4,f5	f4,f5,f6	f5,f6	f5,f6,f8	f6,f8	f6,f8,f10	f6,f8,f10,f12	f8,f10,f12	f8,f10,f12	f8,f10,f12	f10,f12
D	3.5	4	4.8	5.5	6.8	7.5	9	10.5	12.5	14.5	17.5
d	1.8	2.5	3.1	3.8	4.8	5.5	7	8.2	9.8	11.5	13.8
L	18	19	21	24	25.5	30.5	34	38	45	50	55.5

Type	SC(JGK)-120	SC(JGK)-150	SC(JGK)-185	SC(JGK)-240	SC(JGK)-300	SC(JGK)-400	SC(JGK)-500	SC(JGK)-630	SC(JGK)-800	SC(JGK)-1000
ϕ	f12,f16	f12,f16	f16	f16	f16,f20	f16,f20	f16,f20	f20	f22	f22
D	19.5	20.5	23.5	26	30	34	38	45	50	56
d	15.5	16.5	18.8	21	24	27	30	35	40	44
L	63	71	78	92	102	113	123	135	170	200

GT Cable Connecting

1. General

GT series cable connectors are applicable for the connection of the circular wire with power supply cable in distribution equipment. They are made of tin coated 99.9% pure copper tube.

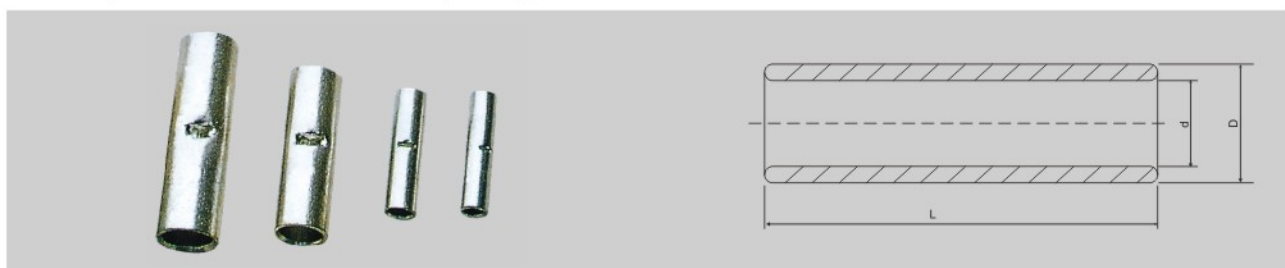

2. Specifications

Unit: mm

Type	D	d	L
GT-1.5	3.7	1.8	20
GT-2.5	4	2.5	20
GT-4	4.8	3.1	20
GT-5.5	5.5	3.8	25
GT-10	6.8	4.8	30
GT-16	7.5	5.5	35
GT-25	9	7	40
GT-35	10.5	8.2	45
GT-50	12.5	9.8	50
GT-70	14.5	11.5	55
GT-95	17.5	13.5	60

Unit: mm

Type	D	d	L
GT-120	19.5	15	65
GT-150	21	16.5	70
GT-185	23.5	18.5	75
GT-240	26.5	21	80
GT-300	30	24	85
GT-400	34	27	90
GT-500	38	30	100
GT-630	45	35	110
GT-800	50	39	150
GT-1000	56	44	170