

Electrical Accessories

Warning Bell	Type	Rating	Voltage	Volume(dB)	Weight(g)
	CB-4B	φ 100m	DC 6V 12V 24V AC 110V 230V 240V	85	350
	CB-6B	φ 150m		95	900
	CB-8B	φ 200m		97	1300
	CB-10B	φ 250m		100	1450

Unit: mm

Electric Bell	Inch	Diamter	Current(≤mA)	Power(VA)
	3	75	70	15
	4	100	97	18
	5	125	98	20
	6	150	100	22
	8	200	105	25
	10	250	125	30
	12	300	150	35

Fire Pushbutton



FIRE-01



FIRE-02


Working VOL	220V AC50HZ 24VDC
Max current	5A 220V AC 50HZ 8A 24VDC
Contact resistance	≤0.1 Ω
Working Temp	Temp:-10 ~+50 °C Max:Relative Humidity: ≤93 ±2%

Flash Lighting	No	Item	Tech.Data
	1	Working Temp Relative humidity	-10 ~ ±55 °C
	2		≤95%RH
	3	Working voltage	DC20 ~DC30V
	4	Working current(average)	95mA
	5	flash in tensity	≥1.2WS
	6	flash cycle	<2.0S
	7	Max warning volume	≥100dB
	8	Flasher life	≥3000Times
	9	Warning tones tesource	police car Fie truck Ambulance
		Size	160 × 128 × 54mm


XH-QG-2

Unit: mm

Siren	Siren	Buzzer
		
MS290	MS190	FM-1

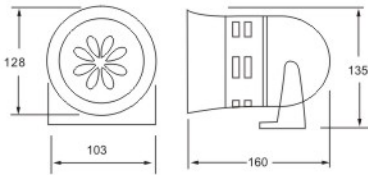

DC12、24V AC110V、220V



DC12、24V AC110V、220V

