


H. R. C. Fuse



1. Specifications

Type	Rated voltage (V)	Rated current (A)	Weight (kg)	Dimension(mm)				
				A	B	C	D	E
RT18-32 1P	380	32	0.075	82	78	35	63	18
RT18-32 2P		32	0.15	82	78	35	63	36
RT18-32 3P		32	0.22	82	78	35	63	54
RT18-63 1P	380	63	0.18	106	103	35	80	26
RT18-63 2P		63	0.36	106	103	35	80	52
RT18-63 3P		63	0.54	106	103	35	80	78

2. Overall and mounting dimensions(mm)

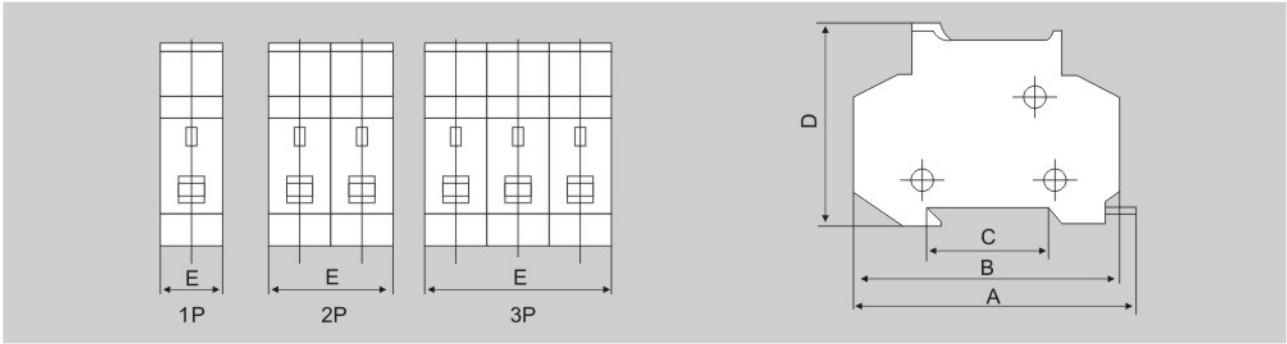

	Dimension mm	Rated current (A)	L max	H max	Φ C
			mm		
	8.5×31.5	2,4,6,10,16	31.5± ⁰ _{0.6}	8.5	8.5±0.1
	10×38	2,4,6,10,16,20,25,32	33±0.6	10.5	10.3±0.1
	14×51	2,4,6,10,16,20,25,32,40,50,63	51± ⁰⁶ ₁₀	13.8	14.3±0.1
	22×58	10,16,20,25,32,40,50,63,80,100	58± ⁰¹ ₂₀	16.2	22.2±0.1
	30×58	63,80,100,125,	58± ⁰¹ ₂₀	16.2	30±0.1