

Electrical Accessories

Unit: mm

Screw On Wire Connectors		Type	Height	Width	Inner diameter	Applicable wire	Colour
	P71	15.0	8.7	6.5	Min#20×1+ #22×1Max#16×2		Grey
	P72	18.0	10.0	7.5	Min#20×3 Max#18×3		Blue
	P73	23.0	11.2	9.5	Min#20×3 Max#16×3+ #18×1		Orange
	P74	24.0	13.6	10.8	Min#14×1+ #18×1 Max#14×4+ #18×1		Yellow
	P75	28.0	16.1	12.7	Min#14×2 Max#10×2+ #12×2		Red

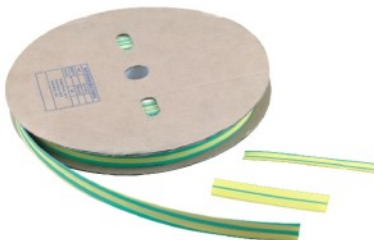
Unit: mm

Cable Gland		Type	Diameter	Screw length
	PG7	3-6.5	8	
	PG9	4-8	8	
	PG11	5-10	8	
	PG13.5	6-12	9	
	PG16	10-14	10	
	PG21	13-18	11	
	PG29	18-25	11	
	PG36	22-32	13	
	PG42	30-33	13	
	PG48	34-44	13	

Unit: mm

Cable Gland		Type	Seal holes	Threaded entry metric	Cable range ϕ	Thread O. D.	Panel mounting Hold	Thread length	Sealing nut size	Lock nut size
	MG12-08B	MG12-08G		M12 × 1.25	7.6 ~ 4.6	12	12.5	8.5	19	18
	MG16-10B	MG16-10G		M16 × 1.5	10 ~ 6	16	16.5	15	22	22
	MG20-14B	MG20-14G		M20 × 1.5	14 ~ 9	20	20.5	15	27	27
	MG25-18B	MG25-18G		M25 × 1.5	18 ~ 13	25	25.5	15	33	33
	MG32-25B	MG32-25G		M32 × 1.5	25 ~ 18	32	33	15	41	41
	MG40-30B	MG40-30G		M40 × 1.5	30 ~ 24	40	41	20	50	50
	MG50-39B	MG50-39G		M50 × 1.5	39 ~ 30	51	51	22	62	61
	MG63-49B	MG63-49G		M63 × 1.5	48.5 ~ 40	63	64	25	75	75

Unit: mm

Heat Shrinkable Tubing		Type	Diameter	Type	Diameter	Type	Diameter	Type	Diameter
	DRS-1	1.0	DRS-7	7.0	DRS-16	16.0	DRS-40	40.0	
	DRS-1.5	1.5	DRS-8	8.0	DRS-17	17.0	DRS-50	50.0	
	DRS-2	2.0	DRS-9	9.0	DRS-18	18.0	DRS-60	60.0	
	DRS-2.5	2.5	DRS-10	10.0	DRS-20	20.0	DRS-70	70.0	
	DRS-3	3.0	DRS-11	11.0	DRS-22	22.0	DRS-80	80.0	
	DRS-3.5	3.5	DRS-12	12.0	DRS-25	25.0	DRS-90	90.0	
	DRS-4	4.0	DRS-13	13.0	DRS-28	28.0	DRS-100	100.0	
	DRS-5	5.0	DRS-14	14.0	DRS-30	30.0	DRS-120	120.0	
	DRS-6	6.0	DRS-15	15.0	DRS-35	35.0	DRS-150	150.0	